



# FIBERGLAS™ INSUL-QUICK® FIBERGLASS INSULATION

Fiberglas™ Insul-Quick® insulation is a lightweight insulation composed of glass fibers bonded together in a semi-rigid, boardlike form with a special high-temperature binder.

## Features

- Thermal efficiency helps conserve energy and lower costly heat loss
- Easy to handle and install, even when large-size boards are used, and won't crumble or break during installation
- Resists tearing and pulling apart, which contributes to excellent long-term installed thermal performance
- Boards in sizes up to 4 feet by 8 feet (1.2 m x 2.4 m) help reduce the number of joints, speeding installation and eliminating potential sources of heat leakage

## Standards, Codes Compliance

- ASTM C612, Mineral Fiber Block & Board Thermal Insulation, Types IA, IB, II
- MIL-DTL-32585, Insulation, Thermal and Acoustic, Fibrous Glass; Types I and II; Form 1; Facing A
- MIL-I-742F Insulation Board, Thermal, Fibrous Glass; Type II
- MIL-DTL-I-24244D (Ships) Insulation Material with Special Corrosion, Chloride, and Fluoride Requirements<sup>1</sup>; Type XVI
- ASTM C795, Thermal Insulation for Use Over Austenitic Stainless Steel
- Complies to ASTM E136, Behavior of Materials in a Vertical Tube Furnace at 750° C (Non-combustible rating)
- Nuclear Regulatory Commission Guide 1.36, Nonmetallic Thermal Insulation<sup>2</sup>
- U.S. Coast Guard Approval No. 164.109, Noncombustible Materials
- CAN/CGSB-51.10; Type, Class 1

1 Preproduction qualification testing complete and on file. Chemical analysis of each production lot required for total conformance.

## Applications


Fiberglas™ Insul-Quick® insulation is designed for use on power and process boilers, breechings, ducts, precipitators, chimney liners, and other heated equipment operating at temperatures up to 850 °F (454 °C). It is used in applications where an outside facing of metal or metal mesh with a finishing cement is required. It can also be used as insulation in a metal panel system.

Fiberglas™ Insul-Quick® insulation is used in panel systems. It is secured to the panel using pins and clips with metal mesh. Panels can be erected flush to heated surfaces or away from them and secured to buckstays or breeching and ductwork angle iron stiffeners.

Fiberglas™ Insul-Quick® insulation can be installed directly to hot, flat, or curved surfaces. It can be attached using welded pins or studs and finished with sheet metal; or using metal mesh and insulating cement, then canvassed and painted. Pins with speed washers or studs and nuts should be installed on 12-inch-by-18-inch (300-mm-by-450-mm) centers (approx.) and the insulation impaled over them. The sheet metal or metal mesh is secured to the same fasteners. Joints of the sheet metal are offset from joints of the insulation.

For temperatures over 400 °F (204 °C), good practice suggests double-layer application, regardless of insulation type. Single-layer installation requires good workmanship to minimize heat loss and hot spots at insulation joints.

Fiberglas™ Insul-Quick® insulation may be installed in either single or multiple layers up to a maximum of 6 inches (152 mm) at all temperatures up to 850 °F (454 °C), or to a maximum of 8 inches (203mm) at temperatures not over 650°F (343 °C).

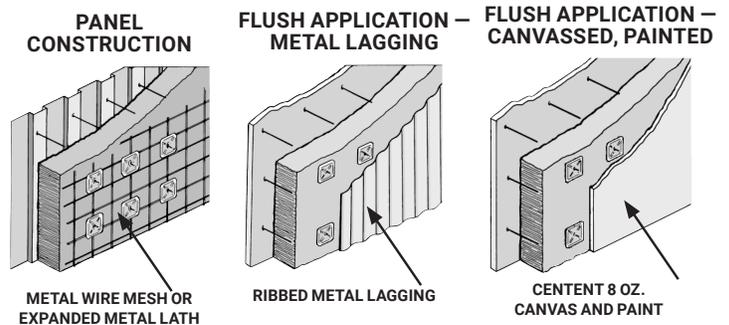

## Physical Properties

PROPERTY	TEST METHOD	VALUE
Hot Surface Performance	ASTM C411	Up to 850 °F (454 °C) Maximum thickness 6" (152 mm) Up to 650 °F (343 °C) Maximum thickness 8" (203 mm)
Compressive Strength at 10% Deformation at 20% Deformation	ASTM C165	90 lb/ft <sup>2</sup> (4309 Pa) 130 lb/ft <sup>2</sup> (6225 Pa)
Nominal Density	ASTM C303	3.0 pcf (48 kg/m <sup>3</sup> )
Water Vapor Sorption	ASTM C1104	< 2.0% by weight, at 120 °F (49 °C), 95% R.H.
Surface Burning Characteristics <sup>2</sup>	UL 723, ASTM E84, or CAN/ULC-S102	Flame Spread < 25 Smoke Developed < 50

2 The surface burning characteristics of these products have been determined in accordance with UL 723, ASTM E84, or CAN/ULC-S102. Values are reported to the nearest 5 rating.

## Thermal Conductivity

MEAN TEMPERATURE °F	k (Btu-in/hr-ft <sup>2</sup> ·°F)	MEAN TEMPERATURE °C	λ W/m·°C
75	0.23	24	0.030
100	0.24	38	0.033
200	0.30	93	0.036
300	0.37	149	0.040
400	0.46	204	0.045
500	0.58	260	0.050

Values are nominal, subject to normal testing and manufacturing tolerances.

## Thermal Performance, ASTM C680

THICKNESS	OPERATING TEMPERATURE, °F (°C)									
	450 (232)		550 (288)		650 (343)		750 (399)		850 (454)	
IN. (MM)	HL	ST	HL	ST	HL	ST	HL	ST	HL	ST
1 (25)	106	179	154	213	213	251	285	294	372	341
2 (51)	58	141	84	162	117	187	156	214	203	245
3 (76)	40	125	58	141	80	159	107	180	140	203
4 (102)	31	116	44	129	61	144	82	160	107	179
5 (127)	25	110	36	121	50	134	66	148	86	164
6 (152)	21	106	30	116	42	126	56	139	72	153
7 (178)	18	103	26	112	36	121	48	132	-	-
8 (203)	16	101	23	108	32	117	42	127	-	-

The above table provides approximate heat loss values (HL), Btu/hr-ft<sup>2</sup>, and Surface Temperatures (ST), °F, for flat surfaces. Values are based on horizontal heat flow, vertical flat surface, 80 °F ambient temperature, still air, weathered aluminum jacket. To convert heat loss values to W/m<sup>2</sup>, multiply values by 3.15. To convert surface temperatures, use the formula: °C=(°F-32) 1.8.

## Sound Absorption Coefficients

ASTM C423; Mounting Type A; Material placed against solid backing

PRODUCT TYPES	THICKNESS	OCTAVE BAND CENTER FREQUENCIES, HZ								NRC
		IN.	MM	125	250	500	1000	2000	4000	
Insul-Quick Unfaced	1	25	0.03	0.25	0.65	0.93	0.99	0.89	0.70	
	2	50	0.10	0.71	1.14	1.14	1.03	0.95	1.00	
	3	75	0.31	1.07	1.26	1.15	1.05	0.97	1.15	
	4	100	0.51	1.19	1.24	1.13	1.04	0.94	1.15	

## Availability

SIZES, IN. (M)	THICKNESS, IN. (MM)
24" x 48"	(0.6 m x 1.2 m)
36" x 48"	(0.9 m x 1.2 m)

Select additional sizes available.

## Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation, and composite solutions, delivering a broad range of high-quality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets, and enhancing lives. More information can be found at [www.owenscorning.com](http://www.owenscorning.com).

## Certifications and Sustainable Features

- Certified by SCS Global Services to contain an average of 53% recycled glass content, 31% pre-consumer, and 22% post-consumer.<sup>3</sup>
- Environmental Product Declaration (EPD)<sup>3</sup>
- Health Product Declaration (HPD)<sup>3</sup>



3 Refer to Heavy Density Board – FIBERGLAS™ 700 Series Insulation Board results

## Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with particular uses of any product described herein.

SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit [www.SCSglobalservices.com](http://www.SCSglobalservices.com).

## Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

**OWENS CORNING INSULATING SYSTEMS, LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OH 43659 USA

**1-800-GET-PINK®**  
**[www.owenscorning.com](http://www.owenscorning.com)**