



EcoTouch® PINK® FIBERGLAS™ Insulation with PureFiber® Technology

Product Data Sheet



PROPINK® EcoTouch® Insulation Product Data

	Width		Length		Thickness	R-Value ¹		
Metal Frame Construction	16" (406mm)	24" (609mm)	48" (1,219mm)	96" (2,438mm)	3½" (89mm)	11		
	16" (406mm)	24" (609mm)	48" (1,219mm)	96" (2,438mm)	3½" (89mm)	13		
	16" (406mm)	24" (609mm)	48" (1,219mm)	96" (2,438mm)	3½" (89mm)	15		
	16" (406mm)	24" (609mm)	48" (1,219mm)	96" (2,438mm)	5½" (139mm)	21		
Wood Frame Construction Walls	15" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	3½" (89mm)	11		
	15" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	3½" (89mm)	13		
	15" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	3½" (89mm)	15		
	15" (381mm)	19¼" (491mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	6¼" (159mm)	19	
	15" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	5½" (139mm)	20		
	15" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	5½" (139mm)	21		
	15" (381mm)	23" (584mm)	105" (2,667mm)	93" (2,362mm)	5½" (139mm)	21		
	23" (381mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	5½" (139mm)	21		
	Floor/Ceiling	15" (381mm)	19¼" (491mm)	23" (584mm)	48" (1,219mm)	93" (2,362mm)	6¼" (159mm)	19
		15" (381mm)	23" (584mm)	48" (1,219mm)	48" (1,219mm)	6¼" (171mm)	22	
15" (381mm)		23" (584mm)	48" (1,219mm)	48" (1,219mm)	8" (203mm)	25		
15½" (394mm)		23¾" (603mm)	48" (1,219mm)	48" (1,219mm)	8" (209mm)	30		
16" (406mm)		19¼" (491mm)	24" (609mm)	48" (1,219mm)	9½" (241mm)	30		
15½" (394mm)		23¾" (603mm)	48" (1,219mm)	48" (1,219mm)	10¼" (260mm)	38		
16" (406mm)		24" (609mm)	48" (1,219mm)	48" (1,219mm)	12" (305mm)	38		
16" (406mm)		24" (609mm)	48" (1,219mm)	48" (1,219mm)	14" (356mm)	49		



Description

Owens Corning™ EcoTouch® Insulation with PureFiber® Technology is flexible insulation made in R-values from 11 to 49. EcoTouch® Insulation is available plain, or faced with either a kraft or foil vapor retarder. The product is manufactured in thicknesses from 3½" to 14".

Uses

EcoTouch® Insulation can be used in a wide range of exterior wall and roof/ceiling applications. The product can be installed in wood or metal framing cavities, or can be installed between furring strips.

Features and Benefits

Excellent Thermal Control

With the range of R-values and thicknesses available, EcoTouch® Insulation can meet most thermal

specifications with ease. The R30C and R38C provide excellent thermal performance in the limited space of cathedral ceilings.

Effective Acoustical Control

EcoTouch® Insulation enhances interior noise control by improving the Sound Transmission Class (STC) of walls and floor/ceiling assemblies.

Long Term Performance

EcoTouch® Insulation is dimensionally stable and will not slump within the wall cavity. Due to its inorganic fibers, EcoTouch® Insulation will not rot or mildew¹ and is noncorrosive to steel, copper, and aluminum.

Easy Installation

EcoTouch® Insulation is easy to handle and install. Sized for installation in either wood or metal stud construction, EcoTouch® Insulation can either be friction-fit or stapled into place. Trimming and fabrication can be done with an ordinary utility knife and is easily installed into odd-shaped cavities and small spaces.

With less dust than other fiberglass insulation products, EcoTouch® Insulation has excellent stiffness and recovery characteristics.²

Designed with the Environment in Mind

EcoTouch® Insulation includes a minimum of 50% total recycled content—the highest certified recycled content available in the fiberglass industry.³ EcoTouch® Insulation is GREENGUARD Gold Certified and is verified to be formaldehyde free.⁴

SpaceSaver Packaging

EcoTouch® Insulation is compression packaged in exclusive SpaceSaver packaging from Owens Corning Insulating Systems. SpaceSaver packaging reduces freight and speeds job site handling/installation.

Design Considerations

Kraft and standard foil facings on this insulation will burn and must not be left exposed. Install facings in substantial contact with the finish material. Protect from open flame or other heat source.



EcoTouch® PINK® FIBERGLAS™ Insulation with PureFiber® Technology

Product Data Sheet

Buildings utilizing curtainwall construction may be required to be equipped with a sprinkler system to provide adequate fire protection. Check local building codes for specific requirements.

Commercial roof/ceiling thermal applications require that the building envelope block the movement of air from the outdoor environment to the conditioned space. Neither the insulation nor its facing should be relied upon to provide an air barrier. Failure to provide an adequate air barrier could lead to loss of thermal control, discomfort of the building occupants and frozen pipes.

When insulation is added to the inside perimeter of a structure, the area outside the insulation becomes exposed to greater temperature extremes. Check for piping which should be protected against freezing.

The need for and placement of a vapor retarder in commercial construction depends on many factors. The architect or specifier should evaluate the requirements of each project. If a vapor retarder is specified, maintaining the facing integrity may be important for effective moisture/humidity control. Repair any punctures or tears in the facing by taping. Follow the tape manufacturer's application recommendations.

Insulation installed too close to light fixtures may affect the luminaire's performance. Do not install insulation on top of or within 3" of recessed light fixtures unless the fixtures are approved

Technical Data

Property (Unit)	Value	Test
Dimensional Stability (shrinkage)	<0.1%	ASTM C167
Surface Burning Characteristics (flame spread / smoke developed)		ASTM E84
Unfaced	25 / 50	
Kraft faced	NR / NR	
Foil faced	75 / 150	
Poly / FSK / PSK faced"	25 / 50	
Critical Radiant Flux (W/cm ²) all facings	>0.12	ASTM E970
Water Vapor Permeance (perms)		ASTM E96
Kraft faced	1.0	
Foil faced	0.5	
Poly faced	0.7	
FSK & PSK faced	0.02	
Water Vapor Sorption (by weight)	<5%	ASTM C1104
Odor Emission	Pass	ASTM C1304
Corrosion Resistance	Pass	ASTM C665, part 13.8
Fungi resistance	Pass	ASTM C1338

Classifications

EcoTouch® Product	ICC Building Construction	ASTM C665
Unfaced	all types	Type I
Kraft faced	Type III, IV, V	Type II, Class C, Cat. I
Foil faced	Type III, IV, V	Type III, Class C, Cat. I

for such use. This is a requirement of the National Electrical Code.

Due to the potential for skin irritation, EcoTouch® Unfaced Insulation should not be used for exposed applications where it will be subject to human contact.

Applicable Standards

EcoTouch® Unfaced Insulation is manufactured in compliance with ASTM Standard Specification C665 and is classified noncombustible per ASTM E136. EcoTouch® Kraft-faced Insulation is manufactured in compliance with ASTM C665, Type II, Class C. EcoTouch® Foil-faced Insulation is manufactured in compliance with ASTM C665, Type III, Class B and C. Federal Specification HH-I-521F has been canceled and is replaced by ASTM C665.

The thermal resistance values for EcoTouch® Insulation were tested in accordance with ASTM C518; R-value for insulation only.


The surface burning characteristics of EcoTouch® Insulation were derived from products tested in accordance with ASTM E84. This standard is used solely to measure and describe properties of products in response to heat and flame under controlled laboratory conditions, and should not be used to describe or approve the fire hazard of materials under actual fire conditions. However, the results of these tests may be used as elements of a fire risk assessment that takes into account all of the factors pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest five rating.



EcoTouch® PINK® FIBERGLAS™ Insulation with PureFiber® Technology

Product Data Sheet

Figure 1

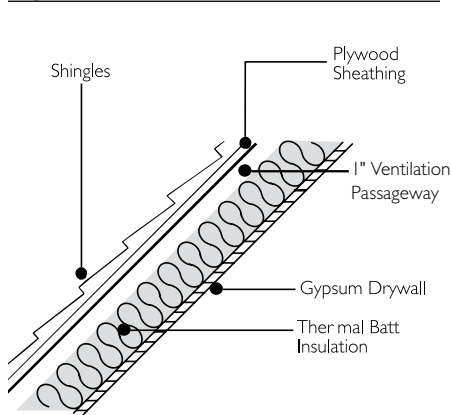

The vapor retarder permeance of the kraft and foil facings on EcoTouch® Insulation were developed from tests conducted in accordance with ASTM E96, desiccant method.

Installation

Between Wood Studs/Rafters


EcoTouch® Insulation fits between studs. If required, the flanges can be stapled to either the face or the side of the stud every 8–12" to prevent gapping or "fishmouthing" of the vapor retarder.

used, the attachment flanges may be taped to the face of the metal stud prior to applying the interior finish. Wire or metal straps should also be used to hold the product in place in applications without a cover material or where the stud depth is larger than the insulation thickness.

Furring Strips

EcoTouch® Insulation can be applied between furring strips, hat channels, or Z-shaped furring in areas where a finish surface will be installed. Contact the furring strip manufacturer for appropriate fastening system.

Figure 2

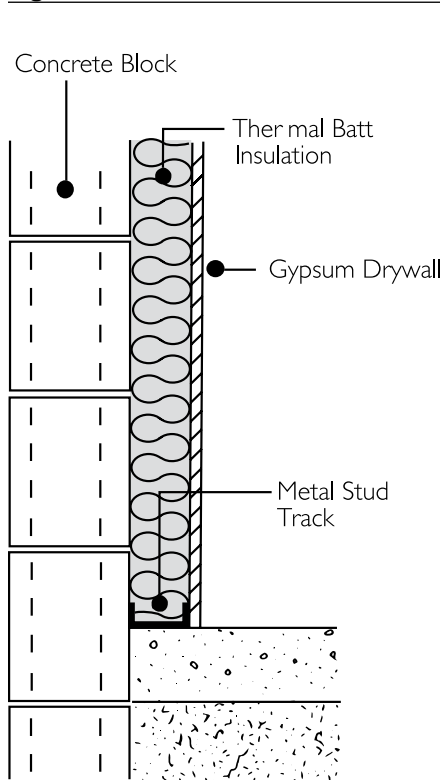

EcoTouch® Unfaced insulation can be friction-fit between studs after the cover material has been installed on one side of the cavity. Use wire or metal straps to hold insulation in place in applications without a cover material, or where the insulation does not fill the depth of the cavity.

Caution: FIBERGLAS™ insulation may cause temporary irritation to the skin, eyes and respiratory tract. Avoid contact with eyes and skin, wear loose-fitting, long-sleeved clothing, gloves and eye protection when handling and applying the material. Wash with soap and cold water after handling. Wash work clothes separately and wipe out washer.

Cathedral ceiling products (R30C and R38C) are intended to be friction-fit between rafters. Cathedral ceiling insulation should be installed to provide a minimum 1" ventilation passageway between the roof deck and insulation. (See Figure 1) It is recommended to use a vent baffle to assure proper clearance.

Between Metal Studs

EcoTouch® Insulation can be friction-fit in place until the interior finish is applied. Insulation should fill the cavity and the wall should eventually be closed on both sides. (See Figure 2)

In areas where it will be applied in heights over 8', use wire or metal straps to hold the product in place until the interior finish is applied. When faced insulation is



EcoTouch® PINK® FIBERGLAS™ Insulation with PureFiber® Technology

Product Data Sheet

Notes

1. As manufactured, FIBERGLAS™ insulation is resistant to mold growth. However, mold growth can occur on building materials, including insulation, when it becomes contaminated with organic material and when water is present. To avoid mold growth on FIBERGLAS™ insulation, remove any water that has accumulated and correct or repair the source of the water as soon as possible. Insulation that has become wet should be inspected for evidence of residual moisture and contamination, and any insulation that is contaminated should be promptly removed and replaced.
2. According to 2010 clinical trial conducted in Toronto, Canada by Ducker Worldwide on behalf of Owens Corning Insulation Systems, LLC.
3. Certified by Scientific Certifications Systems to have a minimum of 50% recycled glass content, with at least 30% post-consumer recycled and the balance of pre-consumer recycled glass content.
4. Owens Corning™ EcoTouch® Unfaced FIBERGLAS™ insulation is verified to be formaldehyde free by the GREENGUARD Environmental Institute.



GREENGUARD Indoor Air Quality and GREENGUARD Gold Certified Products applies to EcoTouch® Unfaced Batts, EcoTouch® Faced Batts and Unbonded Loosefill Insulation. GREENGUARD Formaldehyde Free applies to EcoTouch® Unfaced Batts and Unbonded Loosefill Insulation.

GREENGUARD Gold Certified Products applies to Flame Spread 25 FSK Faced; Flame Spread 25 Extended Flanges PSK Faced; Sound Attenuation Batt Insulation; Sonobatts® Insulation Unfaced; Sonobatts® Insulation Kraft-Faced and Metal Building Insulation.



**MINIMUM 50% RECYCLED CONTENT
30% POST-CONSUMER
20% PRE-CONSUMER**

SCS 50% recycled content applies to EcoTouch® Unfaced Batts and Rolls, EcoTouch® Faced Batts and Rolls, Loosefill Insulation, Metal Building Insulation products and Flexible Air Handling products.



Applies to EcoTouch® Unfaced Insulation

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation.

GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg.



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659
1-800-GET-PINK®
www.owenscorning.com

Pub. No. 10013811-D. Printed in U.S.A. October 2014. THE PINK PANTHER™ & ©1964–2014 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2014 Owens Corning. All Rights Reserved.

