



TruDefinition®  
**DURATION STORM®**  
Impact-Resistant Shingles with WeatherGuard® Technology



Onyx Black†





## BEAUTY THAT'S DESIGNED TO WEATHER THE STORM.

**TruDefinition® Duration STORM® Impact-Resistant Shingles with WeatherGuard® Technology are the ideal premium shingle choice for homeowners concerned with the effect of severe weather on their roof.**

Unlike standard shingles, *TruDefinition Duration STORM* features patented *WeatherGuard* Technology.

- Integrated polymeric backing material allows the shingles to meet one of the industry's highest ratings for impact resistance, UL 2218, Class 4
- May allow homeowners to qualify for insurance premium discounts<sup>§</sup>

*TruDefinition Duration STORM* Shingles also utilize *SureNail®* Technology that provides *Triple Layer Protection®* in the nailing zone and excellent adhesive power. This shingle and corresponding *ProEdge STORM®* Impact-Resistant Hip & Ridge Shingles<sup>3</sup> are designed for maximum holding power against the high winds of severe storms — up to 130 MPH.\*/+

***TruDefinition Duration STORM* Shingles are specially formulated to provide greater contrast and dimension to any roof.**

They offer beauty and performance that homeowners will enjoy before, during and after the storm.

- Multiple granule colors and shadowing offer a truly unique and dramatic effect
- Available in popular colors with bold, lively contrast and complementing shadow lines for greater dimension
- Limited Lifetime Warranty\*<sup>+/+</sup> (for as long as you own your home)
- 130-MPH Wind Resistance Limited Warranty\*<sup>+/+</sup>
- Algae Resistance Limited Warranty\*

# TWO TECHNOLOGICAL BREAKTHROUGHS IN ONE HIGH-PERFORMANCE SHINGLE.

The innovative features of *TruDefinition Duration STORM* Impact-Resistant Shingles with patented *SureNail* and *WeatherGuard* Technologies offer the following:



**Breakthrough Design.** Featuring a tough, woven engineered reinforcing fabric to deliver consistent fastening during installation.


**Triple Layer Protection.<sup>®</sup>** A unique “triple layer” of reinforcement occurs when the fabric overlays the common bond of the shingle laminate layers that offers excellent fastener holding power.

**Superior Adhesion.** Our enhanced Tru-Bond<sup>®+†</sup> sealant grips tightly to the engineered fabric nailing strip on the shingle below.

**Excellent Adhesive Power.** Specially formulated, wide adhesive bands help keep shingle layers laminated together.

**Exceptional Wind Resistance.** Engineered to deliver 130-MPH<sup>\*/‡</sup> wind warranty performance with only 4 nails. 33% fewer nails are required for maximum warranty protection,<sup>†</sup> which can mean fewer deck penetrations.

**Impact Resistance.** The integrated polymeric backing feature of our patented *WeatherGuard* Technology helps achieve one of the industry's highest ratings.

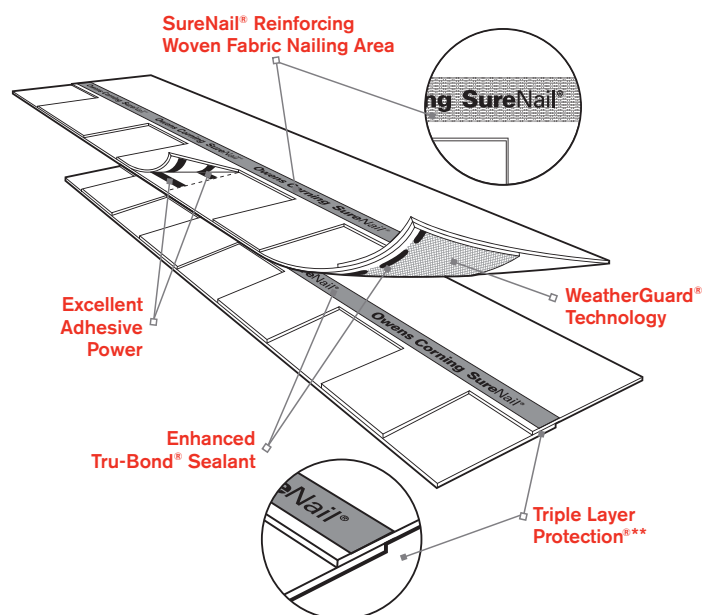

## Available Colors



Desert Tan<sup>†</sup>



Brownwood<sup>†</sup>



Teak<sup>†</sup>



Driftwood<sup>†</sup>



Antique Silver<sup>†</sup>



Estate Gray<sup>†</sup>



Onyx Black<sup>†</sup>

## DURABILITY THAT STANDS UP TO EVERYTHING MOTHER NATURE'S GOT.

### First-class protection.

Underwriters Laboratories (UL) has one of the most demanding standards for testing the impact resistance of shingles.

The UL 2218 test determines the amount of stress a newly manufactured roofing shingle can withstand without cracking. It also rates the shingle's performance. *TruDefinition Duration STORM* Shingles have achieved the highest rating possible – Class 4. Here's how the testing works:


- Four different-sized steel balls are used to simulate the force of free-falling hailstones
- To test impact resistance, shingles are struck twice in the same spot
- A class rating is assigned to signify resistance to a particular size steel ball – the higher the class rating, the greater the resistance

<b>Class 1</b>	1 ¼" steel ball
<b>Class 2</b>	1 ½" steel ball
<b>Class 3</b>	1 ¾" steel ball
<b>Class 4</b>	2" steel ball

### Tough, yet installs easily.

As well as having a best-in-class rating, *TruDefinition Duration STORM* Shingles are also easier to install and handle than other UL 2218-rated shingles. Here's why:

- They resist scuffing and marking during hot-weather installations, unlike rubber-modified shingles
- They will not fuse together in the bundle or on the rooftop during high-temperature conditions

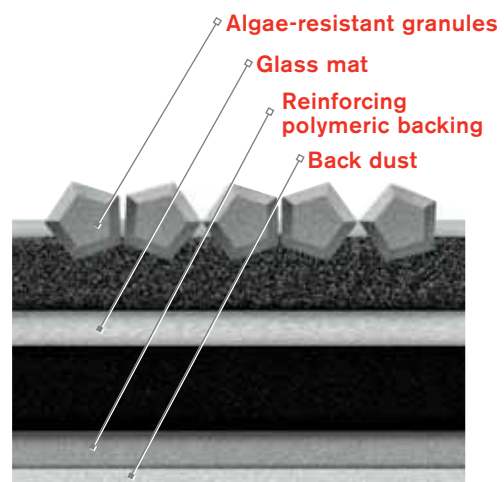

WeatherGuard Technology U.S. Patent 6,228,785.





Estate Gray†

## Product Attributes

Warranty Length\*

Limited Lifetime†† (for as long as you own your home)

Wind Resistance Limited Warranty\*

130 MPH‡

Algae Resistance Limited Warranty\*

10 Years

Tru PROtection® Non-Prorated Limited Warranty\* Period


10 Years

## TruDefinition® Duration STORM® Shingles Product Specifications

Nominal Size	13¼" x 39⅞"
Exposure	5⅝"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.

## ProEdge STORM® Hip & Ridge Shingles Product Specifications

Nominal Size	12" x 36"
Piece Size	12" x 12"
Exposure	6"
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33 ft.



## Applicable Standards and Codes

UL 2218, Class 4 Impact³

ASTM D 3462

ASTM E 108, Class A Fire

ASTM D 3161, Class F Wind

CSA 123.5

ASTM D 3018, Type 1

ASTM D 228

UL 790, Class A Fire

ASTM D 7158, Class H Wind²

\* See actual warranty for complete details, limitations and requirements.

†† This illustration depicts *Triple Layer Protection*, and the amount of *Triple Layer Protection* may vary on a shingle-to-shingle basis.

† Owens Corning strives to accurately reproduce photographs of shingles. Due to manufacturing variances, the limitations of the printing process and the variations in natural lighting, actual shingle colors and granule blends may vary from the photo. The pitch of your roof can also impact how a shingle looks on your home. We suggest that you view a roofing display or several shingles to get a better idea of the actual color. To accurately judge your shingle and color choice, we recommend that you view it on an actual roof with a pitch similar to your own roof prior to making your final selection. Color availability subject to change without notice. Ask your professional roofing contractor for samples of colors available in your area.

†† 40-Year Limited Warranty on commercial projects.

‡ 130 MPH is applicable only with 6-nail application for TruDefinition® Duration STORM® Shingles. To maintain the 130-MPH Wind Resistance Limited Warranty, each ProEdge STORM® Hip & Ridge Shingle must be hand-sealed. Failure to hand-seal ProEdge STORM® Hip & Ridge Shingles will reduce wind warranty to 110 MPH. Use of shingle-over ridge vents will affect the impact resistance classification of the ProEdge STORM® Hip & Ridge Shingles; use off-ridge ventilation as an alternative. Refer to the installation instructions for complete details.

‡‡ *Tru-Bond* is a proprietary premium weathering-grade asphalt sealant that is blended by Owens Corning Roofing & Asphalt, LLC.

§ Homeowners should check with their insurance company to see if they qualify.

¹Where allowed by code.

²Not applicable for *ProEdge STORM* Hip & Ridge Shingles.

³*ProEdge STORM* Hip & Ridge Shingles are required to complete UL 2218 Class IV Impact-Resistant Roof System.

*SureNail* Technology U.S. Patent 7,836,654 and other patents pending.


*WeatherGuard* Technology U.S. Patent 6,228,785.



# The Total Protection Roofing System™<sup>^</sup> for UL 2218, Class 4 Impact-Resistant Shingles

It takes more than just TruDefinition® Duration STORM® Shingles to protect your home. It takes an integrated system of components and layers designed to withstand the forces of nature outside while controlling temperature and humidity inside.

The Total Protection Roofing System™<sup>^</sup> depicted below is specially designed to give you the assurance that all your required Owens Corning™ roofing components\* are working together to help increase the performance of your roof – and to enhance the comfort and enjoyment of those who live beneath it.

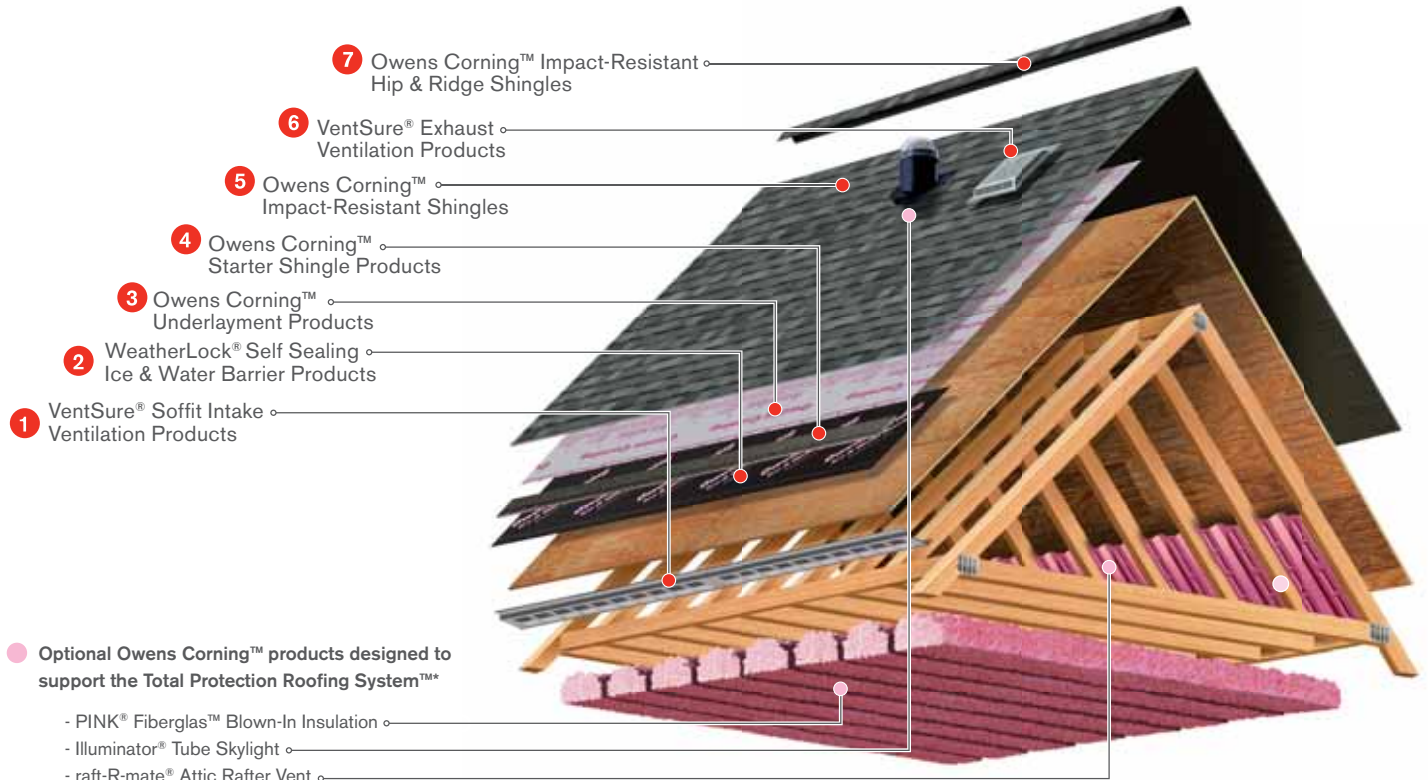


<sup>^</sup>Excludes non-Owens Corning™ roofing products such as flashing, fasteners and wood decking.

\*130 MPH is applicable only with 6-nail application for TruDefinition® Duration STORM® Shingles. To maintain the 130-MPH Wind Resistance Limited Warranty, each ProEdge STORM® Hip & Ridge Shingle must be hand-sealed. Failure to hand-seal ProEdge STORM® Hip & Ridge Shingles will reduce wind warranty to 110 MPH. Use of shingle-over ridge vents will affect the impact resistance classification of the ProEdge STORM® Hip & Ridge Shingles; use off-ridge ventilation as an alternative. Refer to the installation instructions for complete details.



Help protect against heat and moisture buildup by creating a balanced flow of air through your attic.




Help protect vulnerable areas where water can do the most damage: eaves, valleys, dormers and skylights.




Help prevent damage from wind-driven rain by providing an additional layer of protection between the shingles and roof deck.




Enjoy clean lines and faster, easier installation by eliminating the need to cut shingle tabs.



Choose from a variety of durable styles and colors that provide the first line of defense against the elements.



Help protect your roof against premature failure by allowing heat and moisture to escape from the attic.



Help protect the ridge vent and add an attractive, finished look to your entire roof.



**OWENS CORNING ROOFING AND ASPHALT, LLC**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659  
**1-800-GET-PINK®**  
[www.roofing.owenscorning.com](http://www.roofing.owenscorning.com)

Pub. No. 10015764-B. Printed in U.S.A. June 2013. THE PINK PANTHER™ & © 1964–2013 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2013 Owens Corning.

(Brookville, Denver, Medina, Minneapolis, Summit)

