

Product Data Sheet

TotalFlash®

Cavity Wall Drainage Solution




Description

The TotalFlash® Cavity Wall Drainage Solution is a fully integrated flashing and drainage system supplied in 5-1/2' (178.7 cm) - 5' (152.4 cm) net panels, 10 panels/box, 50' (15.2 m) net/box.

Panels consist of: Factory-assembled 0.045" EPDM flashing membrane (with options available), drainage mat with integrated weep tabs, PVC termination bar (with options available), and 26 Ga stainless steel drip edge (with options available).

Drainage mat with no-clog weep tabs standard on all panels: 10" (254 mm) wide x 0.187" (4.76 mm) thick. 90% open-weave polyester mesh.

MPE-1 and BTL-1 sealant, CompleteFlash™ inside/outside corner boots, end dams, and adjustable metal drip edge inside/outside corners sold separately.

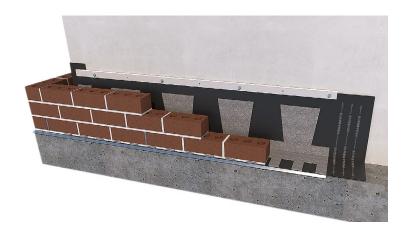

TotalFlash® pre-assembled panels 5-1/2 ' (5 ' net) panel (167.6 cm {152.4 cm net})

Available Components

Flashing Membrane

0.045" EPDM through-wall flashing standard membrane size: 18" (457.2 mm) wide x 0.045" (1.14 mm) thick. Additional available widths: 12" (304.8 mm), 24" (609.5 mm). Custom widths and membrane options available on request.

Termination Bar

 Standard PVC: 1.125" (28.6 mm) wide x 0.125" (3.2 mm) thick x 10' 0" (3.05 m) long. UV stable, non-migratory plasticizers, high strength, corrosion resistant. Stainless steel options available.

Standard Metal Drip Edge

 Standard drip edge: Stainless steel 3/8" (9.5 mm) hemmed edge, 100% recyclable, 3.0" (76.2 mm) wide x 26 Ga thick

Additional Available Drip Edges

- Cold-rolled Copper: 3/8" (9.5 mm) hemmed edge, 100% recyclable
- Kynar-coated galvanized steel: 3/8" (9.5 mm) hemmed edge, 4 color choices (Almond, Tan, Gray, Terra-Cotta)



Termination bar: PVC



Left to right: Stainless Steel, Cold-Rolled Copper, Kynar-coated galvanized steel in 4 color choices — Terra-Cotta, Almond, Gray, Tan.



Product Data Sheet

Sealant

- MPE-1 Modified Polyether: 10.3 Fl. oz (304.6 ml)/tube, moisture cured, nonflammable, low VOC content, superior adhesion to multiple substrates, 10 month shelf life
- BTL-1 Butyl, 10.3 Fl. oz (304.6 ml)/tube, low VOC, silicone and isocyanate-free

Adjustable Metal Drip Edge Corner

 Adjustable metal drip edge corners. Field adjustable to any angle from 325° to 22°. Each leg is 7-1/2" (190.5 mm) long x 3" (76.2 mm) wide. Available in metal to match all straight drip edge options

CompleteFlash™ Flashing Components

- Synthetic Rubber Inside/Outside Corner Boots: 14" (355.5 mm) high x 6" (152.4 mm) wide x 6" (152.4 mm) long. Extend above standard flashing height
- Synthetic Rubber End dams: Right and left 3" (76.2 mm) high x 4" (101.5 mm) wide x 6" (152.4 mm) long. Universal 3" (76.2 mm) high x 4" (101.5 mm) wide x 4" (101.5 mm) long



CompleteFlash™ Synthetic Rubber Components (left to right)
14" High Outside Corner Boot, Universal end dam, 14" High Inside Corner
Boot, Left and Right end dams.



Adjustable metal drip edge corners

The CavityComplete" Wall System excludes the masonry veneer, steel studs and interior and exterior gypsum board. A detailed list of the components is available at www.CavityComplete.com.









