




UNICONFORM® MAT

Excel in conformability and translucency

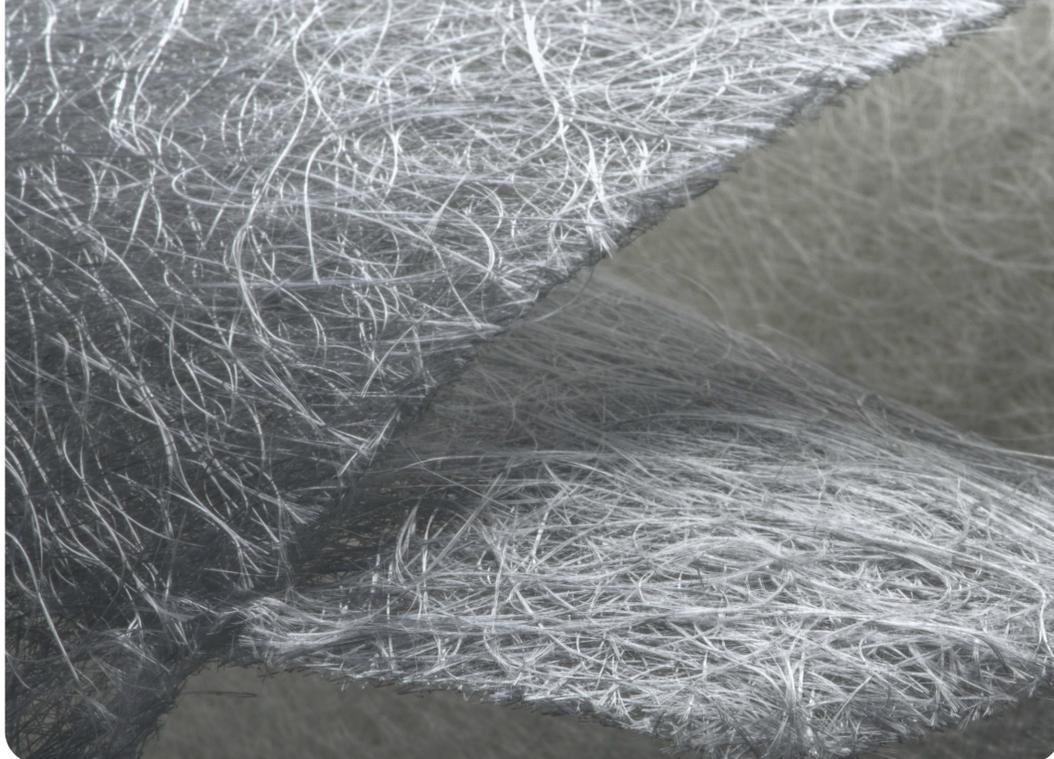

UNICONFORM® mat is well suited for very complex forms requiring high deformation in closed molding process, and enables excellent translucency in panel applications.

✔ Produced with patented Advantex® corrosion resistant E-CR glass by Owens Corning.

✔ Made of continuous filaments randomly oriented and without any binder, synthetic core or stitched yarn.

Product Benefits



Challenging Applications

- Good drapability and high-stretching provide ease of conformability and deformability to complex contours, while easy splicing and overlapping enable large and complex part design.



Corrosion Resistance

- Excellent corrosion resistance with Advantex® Glass compared to standard E-glass: providing longer service life in applications facing corrosion.



Improved Surface Aesthetics

- The open mat structure enables a consistent resin distribution throughout the surface, providing a smooth appearance behind the gelcoat.
- Excellent panel clarity and translucency is provided by the use of glass material — no synthetic core or stitching.



Improved Performances

- Continuous fibers provide high tensile and flexural performance to the final part.
- Lack of organic binder provides improved smoke and fire resistance properties.

Application

UNICONFORM® mat is compatible with unsaturated polyester, vinyl ester, polyurethane and epoxy resin systems.

It is designed for the manufacture of complex shapes, translucent panels and fire-retardant applications in a wide range of industries including recreation, automotive, heavy truck, and commercial buildings.



Courtesy of Polin Waterparks, Turkey.

Availability & Packaging

UNICONFORM® mat is available worldwide.

Depending on the mat weight, the roll width will be 125 or 250 cm (49.2 or 98.4 inches). Additional widths are available upon request by your Owens Corning contact.

NOMINAL MAT WEIGHT (G/M ²)	OZ./SQ. FT.
450	1.5
600	2.0
750	2.5
900	3.0
1200	4.0
1800	6.0
2400	8.0

Each roll is wound on a 103 mm internal diameter cardboard tube and wrapped with a transparent stretch film.

NOMINAL MAT WIDTH (CM/IN)	ROLL Ø (CM/IN)	ROLLS PER PALLET	PALLET SIZE (CM/IN)
125/49.2	38/15	9	114 x 114 (44.88 x 44.88)
250/98.4	38/15	9	Wooden Crate

Labeling

Each roll bears a label detailing the product description, product code, nominal weight, roll width, roll number and manufacture date.

Storage

Unless otherwise specified, it is recommended to store glass fiber products in a cool, dry area. Ideal conditions are at a temperature between 10 °C and 35 °C and a relative humidity between 35% and 85%. The glass fiber products must remain in their original packaging material until the point of usage. If the storage temperature is below 15 °C, it is recommended that the product be stored in the workshop, within its original packaging, at least 24 hours prior to use to help prevent condensation. The packaging is not waterproof. Be sure to protect the product from the weather and other sources of water. When stored properly, there is no known shelf life to the product, but retesting is advised after three years from the initial production date to ensure optimum performance.

**MAKE
MORE
POSSIBLE™**

Americas

One Owens Corning Parkway
Toledo, Ohio, USA 43659
1-800-GET-PINK™

Europe

166 Chaussée De La Hulpe
B-1170 Brussels, Belgium
+32 3 674 8211

Asia Pacific

40/F, Pudong Kerry Parkside,
115 Fang Dian Road, Pudong,
Shanghai, 201204, China
+86-21-61019666

This information and data contained herein is offered solely as a guide in the selection of product. We believe this information to be reliable but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe on any patent or violate any law, safety code, or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10010856-C. UNICONFORM® MAT Product Data Sheet. December 2025. English. © 2026 Owens Corning. All Rights Reserved.