




RANGE INSULATION (TRS & GEM®)

WITH PURESOLUTION® TECHNOLOGY

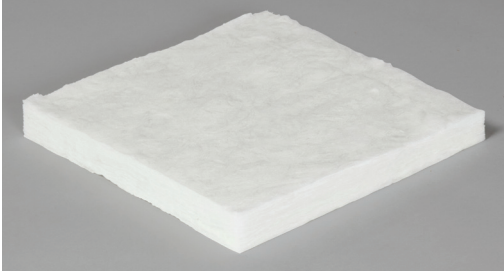

Owens Corning® Range Insulation with PureSolution® Technology products are designed for high temperature commercial and industrial applications up to 1000°F.

The soft white flexible material comes in multiple thicknesses and densities providing ease of handling and installation.

Owens Corning® Range Insulation with PureSolution® Technology meets thermal performance with virtually no smoke and odor at elevated temperatures making is an excellent choice for appliance range applications.

Key Features

- Binder free fibers result in less itch and irritation for installers over blankets with binder
- Broader range of product thickness capabilities below 1"
- Improved K replaces thicker insulation materials with thinner insulation at equivalent R-value
- Thinner insulation opens options for expanded cooking capacity
- Certified high recycled content – 53%
- Manufactured without formaldehyde
- Helps absorb equipment noise, providing acoustic benefits
- Design flexibility with system approach
- Improved small area weight distribution

Thermal Conductivity

GEM® INSULATION WITH PURESOLUTION® TECHNOLOGY

THICKNESS¹ (INCHES)	NOMINAL K VALUE [BTU-IN/(HR • FT² °F)]			NOMINAL K. W/mK		
	75°F	300°F	500°F	23°C	149°C	260°C
0.375	0.22	0.30	0.42	0.032	0.044	0.061
0.500	0.22	0.30	0.42	0.032	0.044	0.061
0.625	0.22	0.29	0.42	0.032	0.042	0.061
0.750	0.22	0.29	0.42	0.032	0.042	0.061
1.000	0.22	0.29	0.42	0.032	0.042	0.061

1. Thickness value is nominal. Product control is on thermal conductivity.

THERMORANGE® SYSTEM (TRS) WITH PURESOLUTION® TECHNOLOGY

PRODUCT FAMILY¹	NOMINAL K VALUE [BTU-IN/(HR • FT² °F)]			NOMINAL K. W/mK		
	75°F	300°F	500°F	23°C	149°C	260°C
TRS-40	0.22	0.35	0.52	0.032	0.050	0.075
TRS-50	0.21	0.31	0.44	0.031	0.045	0.063
TRS-60	0.21	0.30	0.42	0.031	0.044	0.060

1. Thickness value for the product family is nominal. Product control is on thermal conductivity. Products come in thicknesses between ¾" - 1¼" thicknesses in ¼" increments.

Sound Absorption Coefficient, ASTM C423 – Type A Mounting²

PURESOLUTION® TECHNOLOGY

THICKNESS (INCHES)	HZ: 125	250	500	1000	2000	4000	NRC	SAA
0.750	0.05	0.13	0.52	0.97	1.03	1.04	0.65	0.66

2. Nominal samples were measured in accordance with ASTM C423. These measured absorption coefficients are representative of the product with mean specification properties. While these values are an accurate representation of our product, they are for design approximations only. Production, testing, and application variabilities will alter results. Specific designs should be evaluated in end-use configurations.

Availability

Owens Corning® GEM® Insulation with PureSolution® Technology offers a broad range of thickness options below 1". Products are available in numerous thicknesses; minimum 3/8" up to 1" in 1/8" increments. Owens Corning® TRS Insulation with PureSolution® Technology is available in both batt and roll form in 1/4" increments. Thickness ranges from 3/4" to 1 1/4".

Product Applications

Owens Corning® Range Insulation with PureSolution® Technology is a unique and proprietary blend of fiber sciences and manufacturing technology resulting in an insulation product with excellent performance for a broad spectrum of applications such as:

- Self-clean and standard ranges, countertop ranges, and built in wall ovens
- Oven panels and broilers
- Commercial ovens and ranges
- Fireplaces

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>

Standards, Codes Compliance

- Owens Corning® Range Insulation with PureSolution® Technology is non-corrosive to steel (per ASTM C665)
- Owens Corning® Range Insulation with PureSolution® Technology has flame spread/smoke developed indices less than 25/50 per ASTM E84/UL 723 (Unfaced Owens Corning® Range Insulation with PureSolution® Technology is UL listed)
- Owens Corning® Range Insulation with PureSolution® Technology has an operating temperature up to 1,000°F (538°C) for unfaced materials (per ASTM C411)

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of highquality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at: <http://sustainability.owenscorning.com>.

Certificates and Sustainable Features of Owens Corning® Range Insulation with PureSolution® Technology

- Certified by SCS Global Services to contain a minimum of 53% recycled glass content, 31% pre-consumer and 22% post-consumer.
- Certified to meet indoor air quality standards under the GREENGUARD Indoor Air Quality Certification Program, and is GREENGUARD Gold certified.



Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein. Nothing contained in this bulletin shall be considered a recommendation. SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit www.SCSglobalservices.com. GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg.



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659
1-800-GET-PINK®
www.owenscorning.com

Pub. No. 10018404-F. Printed in U.S.A. October 2019.
© 2019 Owens Corning. All Rights Reserved.