




U801 & U809

Strengthen polyurethane foam

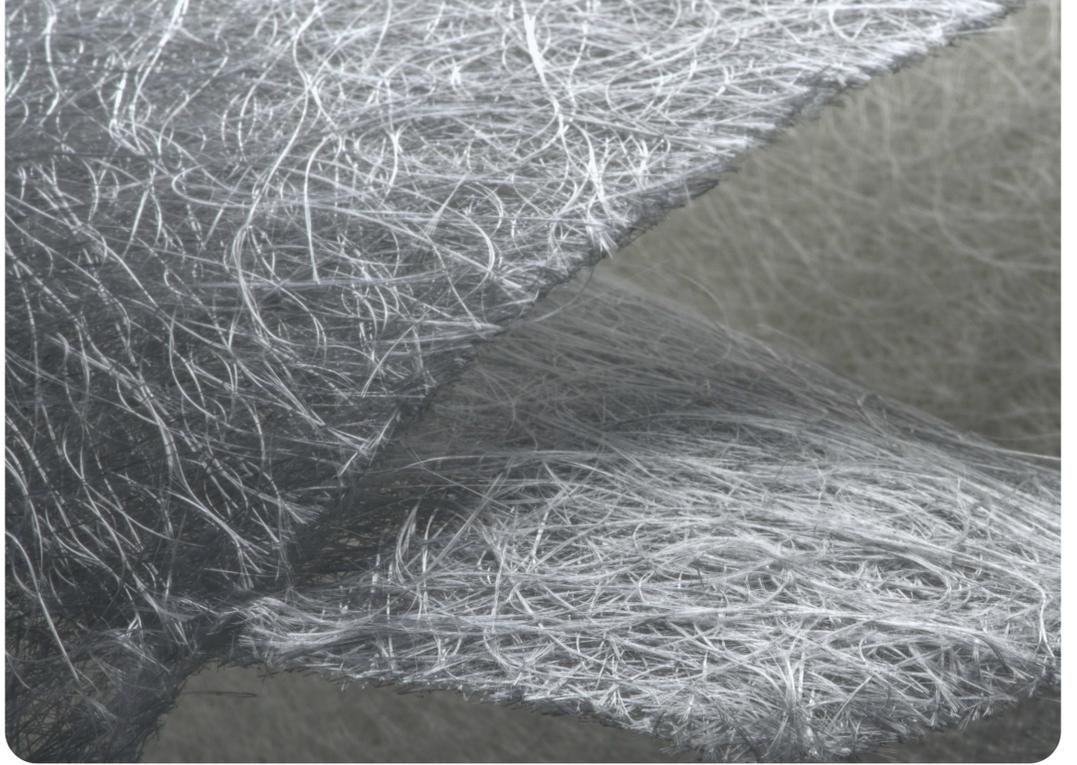

U801/U809 continuous filament mats represent specific solutions to homogeneously reinforce expanded polyurethane foam.

✔ Produced with patented Advantex® corrosion-resistant E-CR glass by Owens Corning.

✔ Made of continuous filaments randomly oriented and bonded together by a thermoset binder.

Product Benefits



Customized For PU Foam Process

- U801/U809 specific design helps to even mat expansion during the PU foaming process.
- U809 is compatible with CO₂ blowing agent used in insulating material manufacturing process. Excellent glass/polyurethane bonding brings improved mechanical performance and dimensional stability to the PU foam.
- U801 superior drapability fits the most complex mold shapes.



Corrosion Resistance

- Excellent corrosion resistance with Advantex® glass compared to standard E-glass: providing longer service life in applications facing corrosion.

Application

U801/U809 mats are compatible with polyurethane resin systems and designed for PU foam reinforcement process. U809 is suited for LNG (Liquified Natural Gas) carrier cryogenic insulating systems. U801 is recommended for PU foam reinforcement in replacement of wood structure, in housing, and recreational vehicle applications.



Availability

U801/U809 are available worldwide. All products are made to order. Additional widths are available upon request by your Owens Corning contact.

NOMINAL MAT WEIGHT (G/CM ²)	NOMINAL MAT WEIGHT (OZ./SQ.FT.)	ROLL WIDTH (CM)	ROLL WIDTH (IN)
225	0.75	-	For all nominal weights
300	1.0	127	50
450	1.5	128	54
600	2.0	-	-
900	3.0	-	-

Packaging

Each roll is wound up on a 103 mm (4.05 in) internal diameter cardboard tube and wrapped with a transparent stretch film.

NOMINAL MAT WIDTH (CM/IN)	ROLL Ø (CM/IN)	ROLLS PER PALLET	PALLET SIZE (CM/IN)
≤105/41	55/22	8	114 x 114 / 45 x 45
105 to 210 / 41 to 83	55/22	4	114 x 114 / 45 x 45
>210/83	55/22	2 to 8	Wooden Crate

Labeling

Each roll bears a label detailing the product description, product code, nominal weight, roll width, roll number, and manufacture date.

Storage

Unless otherwise specified, it is recommended to store glass fiber products in a cool, dry area. Ideal conditions are at a temperature between 10 °C and 35 °C and a relative humidity between 35% and 85%. The glass fiber products must remain in their original packaging material until the point of usage. If the storage temperature is below 15 °C, it is recommended that the product be stored in the workshop, within its original packaging, at least 24 hours prior to use to help prevent condensation. The packaging is not waterproof. Be sure to protect the product from the weather and other sources of water. When stored properly, there is no known shelf life to the product, and retesting is advised after three years from the initial production date to ensure optimum performance.

**MAKE
MORE
POSSIBLE™**

Americas

One Owens Corning Parkway
Toledo, Ohio, USA 43659
1-800-GET-PINK™

Europe

166 Chaussée De La Hulpe
B-1170 Brussels, Belgium
+32 3 674 8211

Asia Pacific

40/F, Pudong Kerry Parkside,
115 Fang Dian Road, Pudong,
Shanghai, 201204, China
+86-21-61019666

This information and data contained herein is offered solely as a guide in the selection of product. We believe this information to be reliable but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe on any patent or violate any law, safety code, or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10023208-A. U801 & U809 Product Data Sheet. December 2025. English. © 2026 Owens Corning. All Rights Reserved.