



SE4849 SINGLE-END ROVING

Faster line speeds and higher glass loadings

Type 30® SE4849 single-end roving represents a compelling solution for Compounders seeking improved productivity through increased line speed, and the potential for higher glass loadings made possible with excellent dispersion.

✔ Produced with patented Advantex® corrosion resistant E-CR glass by Owens Corning.

✔ Compatible with Polyolefins: PP, PE and HDPE resin systems.

Product Benefits



Improved Manufacturing Economics

- Greater than 50% reduction in fuzz generation relative to competitive reinforcements for easier processing and less downtime for clean-up.



Enhanced Service Life

- Advantex® glass helps fight corrosion, enhancing service life compared to standard E-glass.



Superior Composite Strength

- Increased splice tensile strength improves package to package transfer efficiency.
- Increased lubricity imparts lower strand tension enabling up to a 40% increase in compounding line speed for reduced manufacturing costs.



Superior Glass Dispersion And Increased Part

- Outstanding compatibility with Polyolefins, enabling better wet-out, uniform glass dispersion and potentially higher glass loading.
- Optimized adhesion to the polymer matrix offering excellent mechanical properties to meet stringent end-use requirements.

Application


SE4849 product is designed for use in LFT-G (pellets) Polyolefin (primarily PP) hot-melt compounding processes for the manufacturing of structural and semi-structural automotive applications including front-end modules, seat carriers and door modules, as well as a variety of consumer goods, appliances and power tools. SE4849 is also optimized for used in CFRT (Continuous Fiber Reinforced Plastic) tapes for structural applications where the performance characteristics of a continuous unidirectional glass reinforcement can significantly improve end-use performance.

Availability & Technical Characteristics

TEX	YIELD	FILAMENT DIAMETER (μ)	LOSS ON IGNITION (%)	MOISTURE (% MAX)	MANUFACTURING REGION
1100	450	16	0.55%	0.05%	North America
2200	225	16	0.60%	0.05%	North America
2400	207	17	0.40%	0.05%	North America, Europe, Asia Pacific
4400	113	23	0.40%	0.05%	Asia Pacific
4800	103	24	0.40%	0.05%	Asia Pacific
4800	103	17	0.40%	0.05%	Asia Pacific

Mechanical Properties & Performance Testing

Fuzz Generation 50%–83% better than competitors

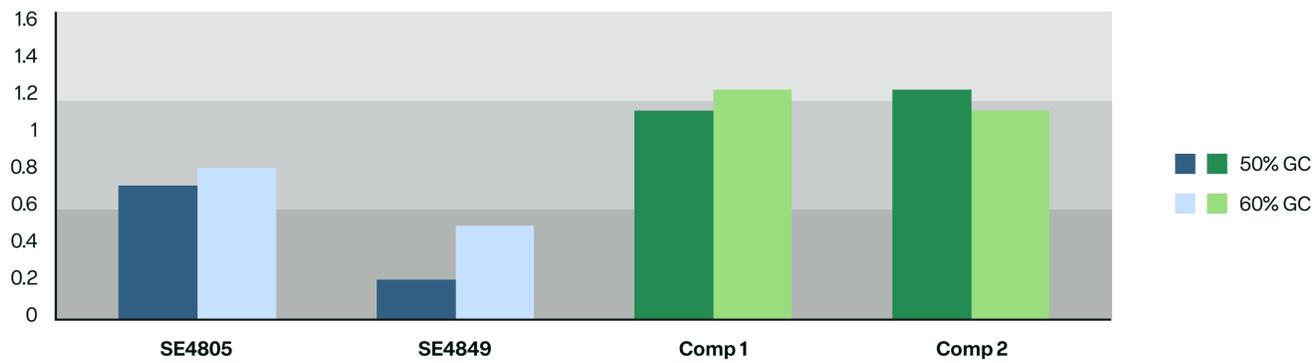

Owens Corning internal Testing - Ibaraki Q4 2013.

Packaging

PALLET DIMENSIONS

PACKAGING	PALLET HEIGHT (CM)	PALLET LENGTH (CM)	PALLET WIDTH (CM)	PALLET WEIGHT (NET, KG)	PACKAGES PER PALLET	NUMBER OF LAYERS
No Tube	~ 125	115	115	~ 1200	64	4
No Tube	~ 97	115	115	~ 900	48	3
Thicker Tube	~ 200	115	115	~ 900	48	3

Package size will vary by region.

Labeling

Each individual package is labeled with information including: product name, tex/yield, producing plant, and production date.

Storage

Unless otherwise specified, it is recommended to store glass fiber products in a cool, dry area. The glass fiber products must remain in their original packaging material until the point of usage. The product should be stored in the workshop in its original packaging for 48 hours prior to its utilization, to allow it to reach the workshop temperature condition and prevent condensation, especially during the cold season. The packaging is not waterproof. Be sure to protect the product from the weather and other sources of water. When stored properly, there is no known shelf life to the product, but retesting is advised after three years from the initial production date to insure optimum performance.

**MAKE
MORE
POSSIBLE™**

Americas

One Owens Corning Parkway
Toledo, Ohio, USA 43659
1-800-GET-PINK™

Europe

166 Chaussée De La Hulpe
B-1170 Brussels, Belgium
+32 3 674 8211

Asia Pacific

40/F, Pudong Kerry Parkside,
115 Fang Dian Road, Pudong,
Shanghai, 201204, China
+86-21-61019666

This information and data contained herein is offered solely as a guide in the selection of product. We believe this information to be reliable but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe on any patent or violate any law, safety code, or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10023664-B. SE4849 Product Data Sheet. December 2025. English. © 2026 Owens Corning. All Rights Reserved.