



ME1960 MULTI-END ROVING

Versatility for efficiency and aesthetics

ME1960 multi-end roving represents a versatile solution for a large-surface of SMC (Sheet Molding Compound) components that require a combination of efficient processing, high mechanical, and aesthetic properties.

✔ Produced with patented Advantex® corrosion resistant E-CR glass by Owens Corning.

✔ Compatible with polyester and vinyl ester resin systems as well as some polyurethane resins.

FOR LARGE-SURFACE SMC COMPONENTS

Product Benefits



Efficient Processability

- Easy unwinding and chopping, flat lay-down, and uniform dispersion with low fuzz and static for large and/or semi-structural part molding.



Enhanced Service Life

- Advantex® glass helps fight corrosion, enhancing service life compared to standard E-glass.



Ideal Color (White) For Pigmented Parts

- Desirable product flow within mold at low shrinkage delivers a resin-rich white-color surface aspect with low-porosity which facilitates good pigmentation or painting of finished parts.




Enhanced Performance

- Better wet-out allows higher glass loading (up to 65% according to a 2016 single customer data source) due to excellent wet-through and impregnation. This can be leveraged to further enhance the mechanical strength and stiffness of the composite part in complex structures.

Application

ME1960 product is designed for the manufacture of large transportation components such as cab door skins for heavy-duty trucks, buses, and trains as well as home fixtures and other semi-structural general-purpose products requiring high modulus, strength, and aesthetics.

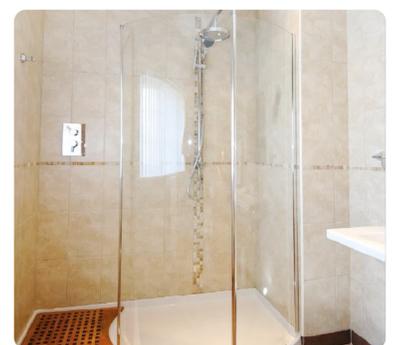

Technical Characteristics

LINEAR WEIGHT OF ROVING (TEX)	YIELDS (YD/LB)	LOSS ON IGNITION (%) ISO 1187:2014
2400	207	1.30
4800	110	1.30

Availability & Packaging

Other Tex may be available upon request. Please consult with your Owens Corning representative.

MANUFACTURING REGION	PRODUCT/DOFF DESCRIPTION	EXTERNAL Ø (IN)	HEIGHT (IN)	NET WEIGHT (LB)
Europe	ME1960 2400 Tex	290	260	20

Each doff is protected by Tack-Pak® packaging. Please do not remove film during use. Creel-Pak® packaging is available upon request.

MANUFACTURING REGION	PRODUCT	DOFF Ø (IN)	PALLET DIM LxWxH (IN & CM)	LAYERS PER PALLET	DOFFS PER LAYER	NUMBER OF ENDS	PALLET NET WEIGHT (LB)
Europe	ME1960 2400 Tex	290	90 x 120 x 122	4	12	1 to 16	1,000
	ME1960 4800 Tex		120 x 120 x 122	4	16		1,220

Labeling

Each doff has a self-adhesive identification label, showing the product reference and the production date. Each pallet has at least one identification label detailing the product reference, pallet net and gross weights, production date, and pallet production code. The packaging system is designed to allow short term stacking of two pallets. When stacking two-high, care should be taken to correctly and smoothly place the top pallet. It is recommended to use a plywood plate between the two pallets in order not to damage the lower pallet.

Storage

Unless otherwise specified, it is recommended to store glass fiber products in a cool, dry area. Ideal conditions are at a temperature between 10 °C and 35 °C and a relative humidity between 35% and 85%. The glass fiber products must remain in their original packaging material until the point of usage. If the storage temperature is below 15 °C, it is recommended that the product be stored in the workshop, within its original packaging, at least 24 hours prior to use to help prevent condensation. The packaging is not waterproof. Be sure to protect the product from the weather and other sources of water. When stored properly, there is no known shelf life to the product, and retesting is advised after three years from the initial production date to ensure optimum performance.

**MAKE
MORE
POSSIBLE™**

Europe

166 Chaussée De La Hulpe
B-1170 Brussels, Belgium
+32 3 674 8211

India

7th Floor, Alpha Building,
Hiranandani Gardens
Powai, Mumbai- 400076
Landline No – +91 22 66681700

This information and data contained herein is offered solely as a guide in the selection of product. We believe this information to be reliable but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe on any patent or violate any law, safety code, or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10023789-A. ME1960 Product Data Sheet. December 2025. English. © 2026 Owens Corning. All Rights Reserved.