




ANTI-CRAK® HP 67/36

Proven engineered performance



MICROPLASTICS-FREE

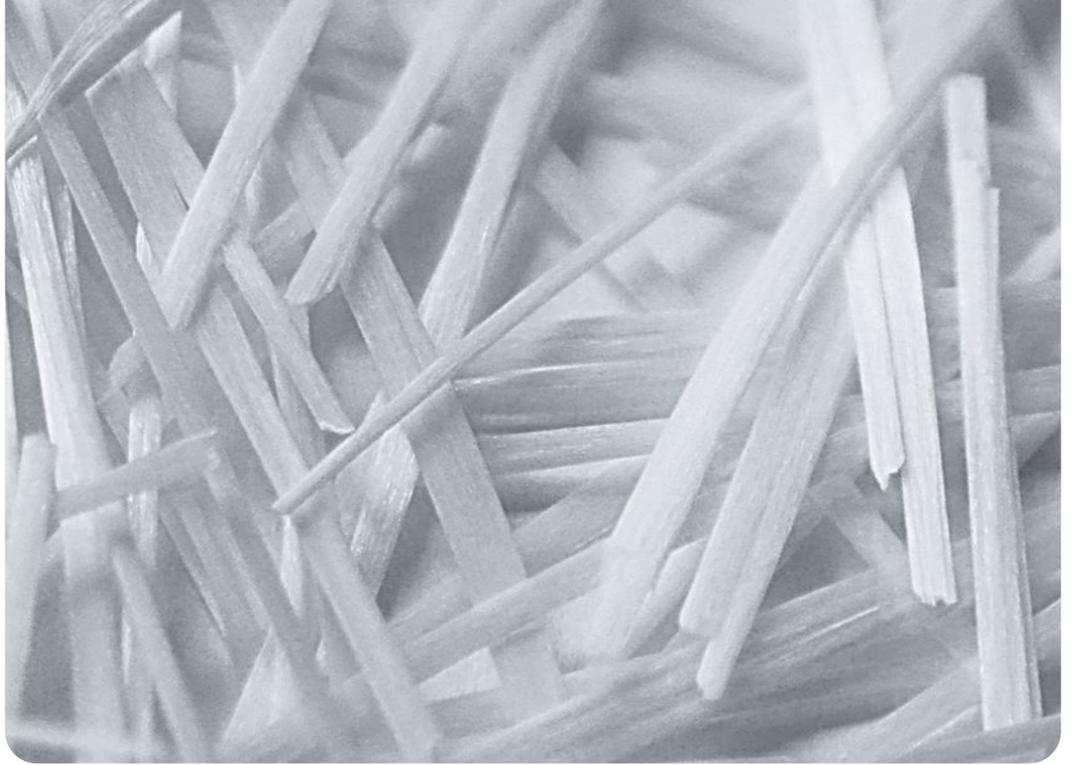

Anti-CRAK® HP 67/36 is designed to provide crack control, flexural performance, toughness, and impact-resistance to slabs-on-ground, commercial and industrial floors, pavements, precast concrete, manufactured products, and other applications.

✓ Produced with Cem-FIL® AR-glass, the alkali resistant glass is specifically designed for concrete reinforcement and lives up to a 50-plus-years reputation.

MACRO FIBER REINFORCEMENT FOR CONCRETE CRACK CONTROL

Product Benefits



Crack Control

- Plastic shrinkage crack mitigation
- High-modulus fiber controlling cracking in hardened concrete from thermal and drying shrinkage
- Impact- and fatigue-resistance
- Increased flexural performance
- Neutral buoyancy and uniform dispersion
- No rust, no staining



Enhanced Performance

- Multi-filament strand mineral fiber with natural affinity to cementitious materials
- Immediate efficiency starting at small crack opening, LOP and beyond
- Enables wider joint spacing and jointless floors



Faster Work

- Replaces the time-consuming preparation and installation of steel rebar
- Easy dosing — ready to add to the concrete, either at the ready-mix plant or at the job site
- Fast dispersion during mixing
- Low impact on workability
- Easy and trouble-free pumping
- Superior finishability

Application

Anti-CRAK® HP 67/36 is used in slabs-on-ground, pavements, bridge decks, roundabouts, concrete pavement overlays, agricultural slabs, commercial and industrial floors, precast concrete, and other applications designed with low crack openings.



Technical Characteristics

FIBER LENGTH	ASPECT RATIO (LENGTH/DIAMETER)	EQUIVALENT DIAMETER (EN14889-2)	MODULUS OF ELASTICITY	TENSILE STRENGTH
36 mm 1-1/2 inches	67	0.54 mm	72 GPa 10 x 10 ⁶ psi	>1 000 MPa >145 x 10 ³ psi

- Electrical Conductivity: very low
- Specific Gravity: 2.68 g/cm³
- Material: Alkali-Resistant Glass¹
- Softening Point: 860°C/1 580°F
- Chemical Resistance: very high
- Loss on Ignition (ISO 1887): 0.80-2.00%
- Moisture (ISO 3344): 0.50% max

¹In compliance with ASTM C 1666 and EN 15422, and under the recommendations of PCI and GRCA.

How to Use

It is recommended to add Anti-CRAK® HP 67/36 at the mixer into wet concrete during the last stage of mixing, or directly into a ready-mix concrete truck on the job site. Mixture proportions and fiber dosage should be verified by testing.

The recommended dosages are:

FIBER TYPE	THERMAL AND SHRINKAGE CRACKING		STRUCTURAL PERFORMANCE	
	kg/m ³	lb/yd ³	kg/m ³	lb/yd ³
Macro	1-5	1.5-8.5	1-15	8.5-25
ADDITION RATE	1-5	1.5-8.5	1-15	8.5-25
BENEFIT	Anti-cracking mesh replacement		Structural mesh and steel rebar replacement	
PRIMARY APPLICATION	Residential floors, light commercial floors		Commercial & industrial floors, pavements, thin-walled precast	

Packaging & Storage

Anti-CRAK® HP 67/36 is packed in plastic bags (5 kg). Anti-CRAK® HP 67/36 should be stored away from heat and moisture, and must stay in its original packaging. Optimum conditions are temperature between 15 °C and 35 °C (59°F to 95°F) and humidity between 35% and 65%. If the product is stored at lower temperatures, it is advisable to condition it in the workshop for at least 24 hours before use, to prevent condensation.

Quality Standards

- Anti-CRAK® HP 67/36 is manufactured under a quality Management System approved to ISO 9001.
- Anti-CRAK® is not classified as dangerous by the Regulation 1272/2008/EC. For more information, please refer to our Safe Use Instruction Sheet.
- CE marking and Declaration of Performance as fibers for use in concrete and mortar through European Technical Assessment.
- Verified Environmental Product Declaration according to ISO 14025 and EN 15804:2019 available upon request.

**MAKE
MORE
POSSIBLE™**

Americas

One Owens Corning Parkway
Toledo, Ohio, USA 43659
+1-866-2GET-GLAS

Europe

166 Chaussée De La Hulpe
B-1170 Brussels, Belgium
+32 3 674 8211

Asia Pacific

40/F, Pudong Kerry Parkside,
115 Fang Dian Road, Pudong,
Shanghai, 201204, China
+86-21-61019666

This information and data contained herein is offered solely as a guide in the selection of product. We believe this information to be reliable but do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe on any patent or violate any law, safety code, or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10024471. Anti-CRAK® HP 67/36 Product Data Sheet. March 2026. English. © 2026 Owens Corning. All Rights Reserved.