


WET-USED CHOPPED STRAND


Owens Corning Wet-Used Chopped Strand (WUCS) provides a reinforcement solution that optimizes the manufacturing process for a variety of applications while increasing product performance. Made from Advantex® glass fibers, WUCS supports the production of wet-laid nonwovens and gypsum plasterboard.

PROCESS

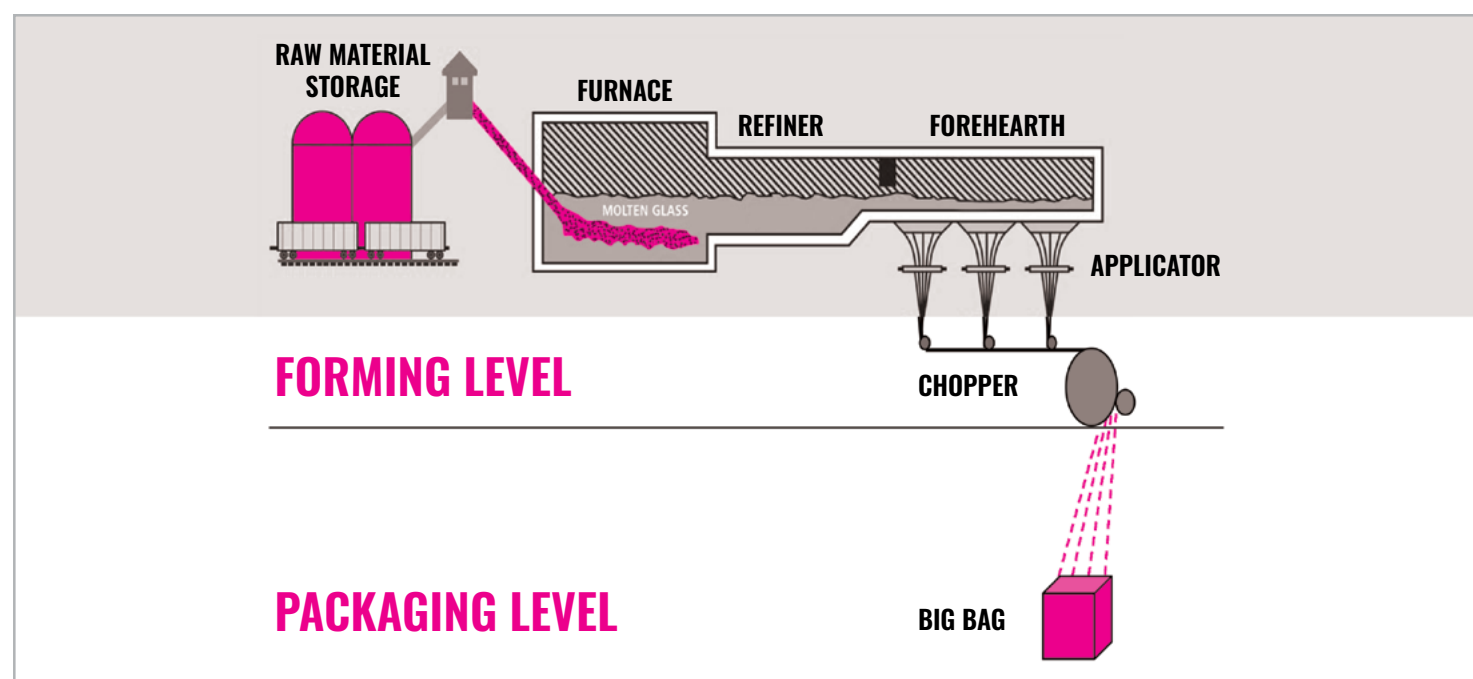

ATTRIBUTES

- Packaged wet, 6 to 15% moisture
- Chopped in different lengths
- Different diameter from 6,5µm to 23µm
- Convert either in wet process producing nonwoven or dry for gypsum plasterboard
- Multiple packagings available

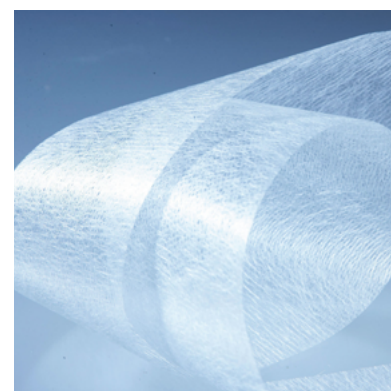

PRODUCT PORTFOLIO

SIZING	FIBER DIAMETER (MICRONS)	CHOP LENGTH (MM)	CHOP LENGTH (IN)	PROCESS	APPLICATIONS	AVAILABILITY	PACKAGING
9501	10	6, 10		Wet	Nonwoven and specialties	Europe	Big bag or small plastic bag
	11	6, 10					
	13	10, 13, 18					
	16	18					
	23	13					
790C	16	6, 13		Dry	Gypsum board reinforcement		
9501	13		3/4"	Wet	WFM and specialties	North America	Gaylord
	16		1", 1 1/4", 1 3/8"				
CS1530	16		1/2"	Dry	Gypsum board reinforcement		

Shelf life varies based on application. Please, contact your representative for more information.



Americas

Owens Corning Composite Materials, LLC
One Owens Corning Parkway
Toledo, OH 43659 USA
1-800-GET-PINK®

Europe

European Owens Corning Fiberglas Spri.
166 Chaussée de la Hulpe
B-1170 Brussels
Belgium
+32 3 674 8211

<https://www.owenscorning.com/composites> | 1-800-GET-PINK®