

# OAKRIDGE® Shingles









# HIGH PERFORMANCE WITH BEAUTY TO MATCH

Oakridge® laminated shingles provide premium protection and impressive curb appeal. A full double layer in the nailing zone gives Oakridge® Shingles greater integrity and better holding power compared to shingles with single-layer nail zones. And the warm, inviting look in popular colours provides a step-up from traditional three-tab shingles.

Oakridge® Shingles are The Right Choice® for long-lasting performance and striking beauty.

#### Oakridge® Shingles offer:

- Limited Lifetime Warranty\*/‡ (for as long as you own your home)
- 177/209 KM/H (110/130 MPH) Wind Resistance Limited Warranty\*\*\*
- StreakGuard™ Protection with a 25-year Algae Resistance Limited Warranty.<sup>3/8</sup>



#### Don't let black streaks lower the value or curb appeal of your home.

Owens Corning blends specialized copper-lined granules, developed by 3M, a leading producer of roofing granules, into our colourful shingles. This helps resist blue-green algae growth.\*

## **OAKRIDGE®**

Shingles



Brownwood<sup>1</sup>



Desert Tan<sup>1</sup>



Driftwood<sup>1</sup>



Estate Gray<sup>1</sup>



Onyx Black<sup>1</sup>



Colour not available in Region 3



THE FINISHING TOUCH

### OWENS CORNING® HIP & RIDGE SHINGLES

Owens Corning® Hip & Ridge Shingles are uniquely colour matched to Oakridge® Shingles. The multiple colour blends are only available from Owens Corning® Roofing and offer a finished look for the roof.




#### **COLOUR DISCLAIMER**

As colour experts, we know getting the shingle colour right is a big part of any roofing purchase. Due to printing colour variations, in addition to viewing shingle literature, we suggest you request an actual shingle sample to see how it will appear on your home and with your home's exterior elements in various natural lighting conditions. Lastly, we recommend you verify your colour choice by seeing it installed on an actual home; your roofing contractor or supplier can provide a sample and may be able to direct you to a local installation.



### TOTAL PROTECTION SIMPLIFIED™

It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to perform in three critical areas. The Owens Corning® Total Protection Roofing System® gives you the assurance that all of your Owens Corning® roofing components are working together to help increase the performance of your roof.

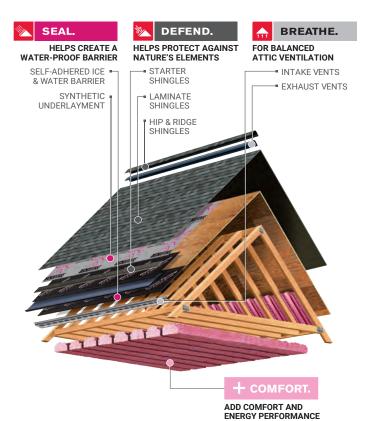

#### **Product Attributes**

Warranty Length\*

Limited Lifetime<sup>‡</sup>

(for as long as you own your home)

Wind Resistance Limited Warranty\*

177/209 KM/H (110/130 MPH)#

Algae Resistance Limited Warranty\*

25 Years

TRU PROtection® Non-Prorated Limited Warranty\* Period

STREAK**guard** 

10 Years

#### **Product Specifications**

Size	13¼" x 39¾"
Application Exposure	5%"
Shingles per Bundle	Not less than 20
Average Shingle Count per 3 Bundles	64
Average Coverage per 3 Bundles	98.4 sq. ft.

#### **Applicable Standards and Codes**

CSA A123.5

**ASTM D3462** 

ASTM D228

ASTM D3018 (Type 1)

ICC-ES AC438#

ASTM D3161 (Class F Wind Resistance)

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

PRI ER 1378E01



OWENS CORNING ROOFING AND ASPHALT, LLC ONE OWENS CORNING PARKWAY TOLEDO, OHIO, USA 43659

PINK® FIBERGLAS® BLOWN-IN ATTIC INSULATION

1-800-GET-PINK\* | 1-800-438-7465 www.owenscorning.ca

Pub. No. 10017465-H. Printed in Canada. October 2024.
THE PINK PANTHER™ & © 1964–2024 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The colour PINK is a registered trademark of Owens Corning.
© 2024 Owens Corning. All Rights Reserved.

- \* See actual warranty for complete details, limitations and requirements.
- ‡ 40-Year Limited Warranty on commercial projects.
- ‡‡ 177 KM/H (110 MPH) is standard with 4-nail application. 209 KM/H (130 MPH) is applicable only with 6-nail application and Owens Corning® Starter Shingle products application along eaves and rakes in accordance with installation instructions.
- Owens Corning testing against competing products with wide, single-layer nailing zones when following manufacturers' installation instructions and nailing in the middle of the allowable nailing zone.
- # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.
- ^ Excludes non-Owens Corning® roofing products such as flashing, fasteners, pipe boots and wood decking.
- 1 See Colour Disclaimer information for additional details.
- 3 Shingles are algae resistant to control the growth of algae and discolouration.
- § This coverage is effective 01/01/2023; Installation must include use of an approved Owens Corning® Hip & Ridge Shingle product. See actual warranty for details.