OAKRIDGE®

Shingles



Brownwood[1]

STREAKGUARD® ALGAE PROTECTION



Desert Tan[1]



HIGH PERFORMANCE
WITH BEAUTY TO MATCH

Oakridge® laminated shingles provide premium protection and impressive curb appeal. A full double layer in the nailing zone gives Oakridge® Shingles greater integrity and better holding power compared to shingles with single-layer nail zones. And the warm, inviting look in popular colours provides a step-up from traditional three-tab shingles.

Oakridge® Shingles are The Right Choice® for long-lasting performance and striking beauty.

Oakridge® Shingles offer:

- Limited Lifetime Warranty*/‡ (for as long as you own your home)
- 177/209 KM/H (110/130 MPH) Wind Resistance Limited Warranty*‡‡
- StreakGuard® Protection with a 25-year Algae Resistance Limited Warranty.[3/§]
- Rated Class 3 for Impact Resistance[8] and may qualify for a homeowner insurance discount.[7]

STREAKGUARD® ALGAE PROTECTION

Don't let black streaks lower the value or curb appeal of your home.
Owens Corning blends specialized copper-lined granules, developed by 3M, a leading producer of roofing granules, into our colourful shingles. This helps resist blue-green algae growth.

OAKRIDGE®

Shingles



Brownwood[1]



Desert Tan[1]



Driftwood[1]



Estate Gray[1]



Onyx Black[1]



Teak[1]

Colour not available in Region 3



THE FINISHING TOUCH

OWENS CORNING® HIP & RIDGE SHINGLES

Owens Corning® Hip & Ridge Shingles are uniquely colour matched to Oakridge® Shingles. The multiple colour blends are only available from Owens Corning® Roofing and offer a finished look for the roof.




COLOUR DISCLAIMER

As colour experts, we know getting the shingle colour right is a big part of any roofing purchase. Due to printing colour variations, in addition to viewing shingle literature, we suggest you request an actual shingle sample to see how it will appear on your home and with your home's exterior elements in various natural lighting conditions. Lastly, we recommend you verify your colour choice by seeing it installed on an actual home; your roofing contractor or supplier can provide a sample and may be able to direct you to a local installation.

TOTAL PROTECTION SIMPLIFIED™

It takes more than just shingles to protect a home. It takes an integrated system of components and layers designed to perform in three critical areas. The Owens Corning® Total Protection Roofing System®^ gives you the assurance that all of your Owens Corning® roofing components are working together to help increase the performance of your roof.

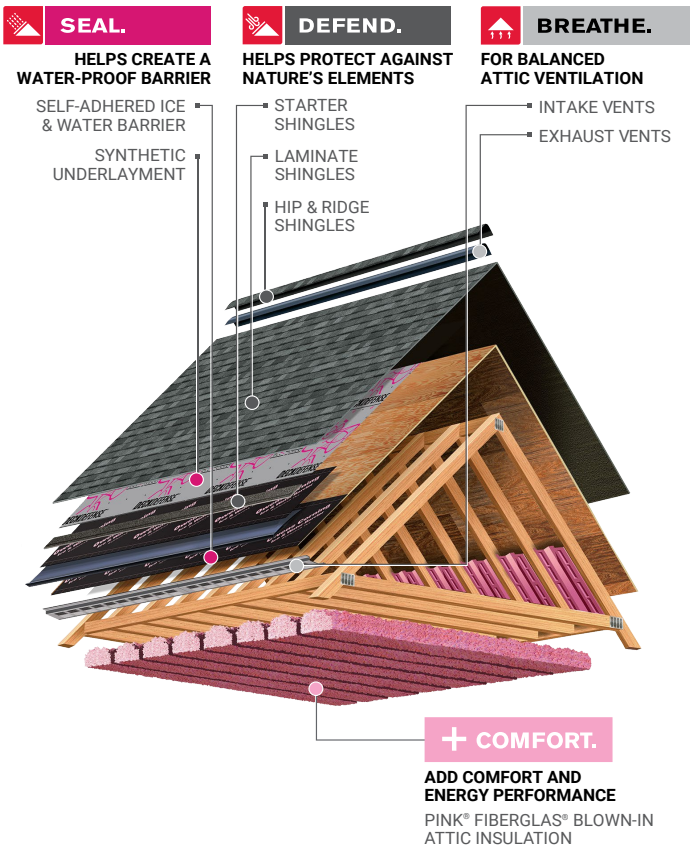

Product Attributes

Warranty Length[*/‡]

Limited Lifetime
(for as long as you own your home)

Wind Resistance Limited Warranty [*/‡‡]

177/209 KM/H (110/130 MPH)

Algae Resistance Limited Warranty[*/§]

25 Years

TRU PROtection® Non-Prorated Limited Warranty* Period

10 Years

Product Specifications

Size	13¼" x 39⅜"
Application Exposure	5⅝"
Shingles per Bundle	Not less than 20
Average Shingle Count per 3 Bundles	64
Average Coverage per 3 Bundles	98.4 sq. ft.

Applicable Standards and Codes

- CSA A123.5
- ASTM D3462
- ASTM D228
- ASTM D3018 (Type 1)
- ICC-ES AC438[#]
- ASTM D3161 (Class F Wind Resistance)
- ASTM D7158 (Class H Wind Resistance)
- ASTM E108/UL 790 (Class A Fire Resistance)
- UL 2218 (Class 3 Impact Resistance)[8]
- PRI ER 1378E01

OWENS CORNING ROOFING AND ASPHALT, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK® | 1-800-438-7465
www.owenscorning.ca

Pub. No. 10017465-J. Printed in Canada. November 2026.

THE PINK PANTHER™ & © 1964–2026 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The colour PINK is a registered trademark of Owens Corning.
© 2026 Owens Corning. All Rights Reserved.

* See actual warranty for complete details, limitations and requirements.

‡ 40-Year Limited Warranty on commercial projects.

‡‡ 177 KM/H (110 MPH) is standard with 4-nail application. 209 KM/H (130 MPH) is applicable only with 6-nail application and Owens Corning® Starter Shingle products application along eaves and rakes in accordance with installation instructions.

† Owens Corning testing against competing products with wide, single-layer nailing zones when following manufacturers' installation instructions and nailing in the middle of the allowable nailing zone.

\# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

^ Excludes non-Owens Corning® roofing products such as flashing, fasteners, pipe boots and wood decking.

1 See Colour Disclaimer information for additional details.

3 Shingles are algae resistant to control the growth of algae and discolouration.

§ Installation must include use of an Owens Corning® Hip & Ridge product. See actual warranty for details.

7 Homeowners should check with their insurance company to see if they qualify.

8 Oakridge® Shingles are tested in a laboratory setting and classified as a UL 2218 Class 3 Impact Resistant shingle. The results of this test do not guarantee that the shingle will resist all weather conditions. Hail damage is specifically excluded from coverage under the terms of its warranty.